

Our Most Durable & Versatile Exterior Decorative Concrete Sealer


SOLVENT-BASED*HIGH-GLOSS*WET-LOOK CLEAR*ACRYLIC*CONCRETE SEALER





PATIOS & TERRACES

HARDSCAPES

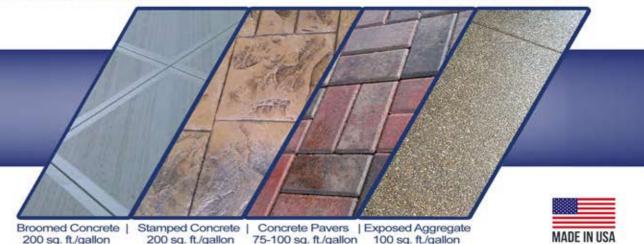

200 sq. ft./gallon



INSTRUCTIONS





















- Clean oil spots with our
 EAGLE CLEANER DEGREASER
 NEUTRALIZER or de-greasing
 soap and water. This step is not required if there are no oil spots.
- 2. For surfaces not porous enough for water to easily soak in, etch concrete with EAGLE ETCH & CLEAN.
- Pressure wash concrete with 3000 psi or higher. It is imperative to thoroughly clean concrete before sealing.
- 4. Fill any cracks with our EAGLE CRACK FILLER.
- Allow concrete to dry for 24 hours without rain before sealing. Do not seal if rain is imminent (usually 24 hours).
- Temperature of air and concrete should be above 50°F and below 90°F during application.
- 7. Use short nap roller (1/4" 3/8") for smooth concrete and long nap roller (1" 1-1/4") for rough textures such as exposed aggregate. Most exterior concrete will need a medium nap roller (1/2" 3/4").
- Anti-Skid additives (not sand) may be added to second coat for added traction.
- Test a sample spot with sealer on concrete. Allow to dry. Be sure that the test spot has good adhesion and appearance is acceptable before proceeding.
- 10. Roll on concrete. Keep roller soaked with sealer. Dip on every stroke. Work sealer in "W" pattern.
- Cross-Roll 2nd coat, working perpendicular to 1st coat. One coat applications should be cross-rolled during application.
- 12. Clean-Up with Xylene or Lacquer Thinner. Do not use Paint Thinner or Mineral Spirits.
- 13. Allow to dry 4 hours prior to foot traffic and 24 hours for auto traffic.

OTHER EAGLE PRODUCTS

& CLEAN



EAGLE CLEANER DEGREASER NEUTRALIZER



EAGLE CRACK FILLER BROWN, GRAY & PLAIN

